

OpenAir™

Air damper actuators, running time 30 s

GDD..1E, GLD..1E



Electronic motor driven actuators for open-close, 3-position and modulating control

- Nominal torque: 5 Nm / 8 Nm
- Operating voltage: AC 24 V ~ / DC 24...48 V =
- Running time for 90° rotary angle: 30 s
- Mechanically adjustable span: 0...90°
- Position indication: mechanical and electrical
- Pre-wired with 0.9 m long connection cables
- Self-adaptation of rotational angle range and adjustable auxiliary switches for supplementary functions

The rotary actuators are used in ventilation and air conditioning plants to regulate and shut off air dampers:

- GDD..1E for damper areas up to 0.8 m²
GLD..1E for damper areas up to 1.2 m²
(These are guidelines; always observe damper manufacturer's data.)
- Suitable for use with modulating controllers (DC 0/2...10 V), open-close or 3-position controllers for air dampers or air throttles.
- We recommend a minimum pulse length of 500 ms on rotary actuators operated with 3-position control to ensure continuous and accurate operation.

Functions

GDD.., GLD..		141.1E 146.1E	161.1E
Power supply		AC 24 V ~ / DC 24...48 –	
Control type		Open-close 3-position	Modulating control (0/2...10 V)
Rotary direction		Clockwise or counter-clockwise direction depending...	
		• ...on the type of control; • ...on the setting of the rotary direction switch. CW  CCW 	• ...on the position signal; • ...on the setting of the rotary direction DIL switch. CW  CCW 
		With no power applied, the actuator remains in the respective position.	The actuator remains in the achieved position... • ...if the control signal is maintained at a constant value; • ...in the event of a loss of operating voltage.
Position indication:	Mechanical	Rotary angle position indication by using a position indicator.	
	Electrical	-	Output voltage U = DC 0/2...10 V is generated proportionally to the rotary angle. U depends on the rotary direction of the DIL switch setting.
Auxiliary switch		The switching points for auxiliary switches A and B can be set independently of each other in increments of 5° within 0...90°.	
Manual adjustment		The actuator can be manually adjusted by pressing the gear train disengagement button.	
Rotary angle limitation		The rotary angle of the shaft adapter can be limited mechanically with a set screw.	

Technical design

Housing

The housing consists essentially of flame retardant, non-brominated, non-chlorinated glass fiber reinforced plastic.

Actuator motor / Gears

- Brushless, robust DC motors ensure reliable operation regardless of load. The damper actuators do not require an end position switch, are overload proof, and remain in place upon reaching the end stop.
- The gears are maintenance-free and low noise.

Type summary

Type	Stock no.	Nom. torque	Control	Operating voltage	Positioning signal Y	Position indicator U = DC 0...10 V	Self-adapt. of rot. angle range	Aux. switch	Rotary direct. switch
GDD141.1E	S55499-D592	5 Nm	Open-close or 3-position	AC 24 V ~ / DC 24...48 V =	-	-	-	-	yes
GDD146.1E	S55499-D593							2	
GDD161.1E	S55499-D594		Modulating			DC 0/2...10 V =	yes	yes	-
GLD141.1E	S55499-D595	8 Nm	Open-close or 3-position	AC 24 V ~ / DC 24...48 V =	-	-	-	-	yes
GLD146.1E	S55499-D596								
GLD161.1E	S55499-D597		Modulating				DC 0/2...10 V =	yes	yes

Accessories

See data sheet N4698.

Product documentation

Topic	Title	Document ID:
Mounting instructions	Fast running air damper actuators GDx..1E, GLx..1E	A6V11684392
Data sheet	Accessories and spare parts for air damper actuators ASK..	CM2N4698

Related documents such as the environmental declarations, declarations of conformity, etc., can be downloaded from the following Internet address:

www.siemens.com/bt/download

Security

 CAUTION	
	National safety regulations Failure to comply with national safety regulations may result in personal injury and property damage. • Observe national provisions and comply with the appropriate safety regulations. • Only qualified personnel may mount, commission, and service the device.

Engineering

Potentiometer and auxiliary switches

Potentiometer and auxiliary switches cannot be added in the field.

Installation

 WARNING	
	No internal line protection for supply lines to external consumers Risk of fire and injury due to short-circuits • Adapt the line diameters as per local regulations to the rated value of the installed fuse.

Maintenance

The actuators G..D..1E are maintenance-free.

Disposal

	The device is considered an electronic device for disposal in accordance with European Directive and may not be disposed of as domestic waste. • Use only designated channels for disposing the devices. • Comply with all local and currently applicable laws and regulations.
---	---

Technical data

Power supply			GDD..1E	GLD..1E
Operating voltage			AC 24 V ~ $\pm 20\%$ (19.2...28.2 V ~) DC 24...48 V = $\pm 20\%$ (19.2...57.6 V =) (SELV / PELV)	
Frequency			50/60 Hz	
Power consumption	Running	G..D14..1E	1.2 W / 1.9 VA	1.6 W / 2.3 VA
		G..D16..1E	1.5 W / 2.1 VA	1.8 W / 2.5 VA
	Holding	G..D14..1E	0.4 W / 0.7 VA	0.4 W / 0.7 VA
		G..D16..1E	0.6 W / 0.9 VA	0.6 W / 0.9 VA

Function data		GDD..1E	GLD..1E
Nominal torque		5 Nm	8 Nm
	Maximum torque (blocked)	10 Nm	16 Nm
	Minimum holding torque	5 Nm	8 Nm
Nominal rotary angle (with position indication)		90°	
	Maximum rotary angle (mechanic limitation)	95° ± 2°	
Runtime for 90° rotary angle		30 s	
Actuator sound power level		32 dB (A)	

Inputs			
Positioning signal for G..D14..1E			
	Operating voltage	(wires 1-6 / G-Y1)	Clockwise
	AC 24 V ~ / DC 24...48 V =	(wires 1-7 / G-Y2)	Counter-clockwise
Positioning signal for G..D16..1E			
	Input voltage	(wires 8-2 / Y-G0)	DC 0/2...10 V =
	Current consumption		0.1 mA
	Input resistance		>100 kΩ
Max. permissible input voltage			DC 35 V = limited to DC 10 V =
	Protected against faulty wiring		Max. AC 24 V ~ / DC 24...48 V =
Hysteresis for non-adjustable characteristic function			60 mV

Outputs		
Position indicator		
Output signal (G..D16..1E)	(wires 9-2 / U-G0)	
	Output voltage U	DC 0...10 V =
	Max. output current	DC $\pm$ 1 mA
	Protected against faulty wiring	Max. AC 24 V ~ / DC 24...48 =

Mechanical life	
Full cycles	60'000
Partial cycles	5'000'000

Auxiliary switches (G..D146.1E)		
Switching voltage	AC 24...250 V ~ / DC 12...30 =	
Contact rating	6 A resistive, 2 A inductive, min. 10 mA at AC 4 A resistive, 2 A inductive, min. 10 mA at DC 30 V = 0.8 A resistive, 0.5 A inductive, min. 10 mA at DC 60 V =	
Electric strength auxiliary switch against housing	AC 4 kV	
Switching range for auxiliary switches / setting increments	5...90° / 5°	
Factory setting	Switch A	5°
	Switch B	85°

Connection cables	
Cable length	0.9 m
Cross-section	0.75 mm ²
Permissible length for signal lines	300 m

Degree of protection		
Insulation class	As per EN 60730	
	AC 24 V ~ / DC 24...48 =	III
	Auxiliary switches	II
Housing protection	IP54 as per EN 60529	

Environmental conditions		
Operation		IEC 60721-3-3
	Climatic conditions	
		Class 3K5
		Mounting location
		Interior, weather-protected
	Temperature extended	
	-32...55 °C	
	Humidity (non-condensing)	
	<95 % r.h.	
Transport		IEC 60721-3-2
	Climatic conditions	
		Class 2K3
		Temperature extended
		-32...70 °C
	Humidity (non-condensing)	
	<95 % r.h.	
Storage		IEC 60721-3-1
	Climatic conditions	
		Class 1K3
		Temperature extended
		-32...50 °C
	Humidity (non-condensing)	
	<95 % r.h.	
Mechanical conditions		Class 2M2

Standards, directives and approvals		
Product standard		EN 60730 / Part 2-14 Particular requirements for electric actuators
Electromagnetic compatibility (Applications)		For use in residential, commercial, light-industrial and industrial environments
EU Conformity (CE)		
	GDD..1E	A5W00026942 ¹⁾
	GLD..1E	A5W00026944 ¹⁾
UK Conformity (UKCA)		
	GDD..1E	A5W00219359A ¹⁾
	GLD..1E	A5W00219360A ¹⁾
RCM		
	GDD..1E	A5W00026946 ¹⁾
	GLD..1E	A5W00026948 ¹⁾
EAC		Eurasian conformity

Environmental compatibility
The product environmental declaration A5W00026066 ¹⁾ contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).

Dimensions		
Actuator W x H x D		See Dimensions [► 11]
Suitable drive shafts	Round shaft	8...16 mm
	Round shaft (with centering element)	8...10 mm
	Square shaft	8...12.8 mm
	Hexagon	8...14 mm 15 mm ²⁾
	Min. drive shaft length	30 mm
	Max. shaft hardness	<300 HV

Weight		
Without packaging	Without switches	Max. 0.49 kg
	With switches	Max. 0.63 kg

¹⁾ The documents can be downloaded from <http://siemens.com/bt/download>.

²⁾ This value only works with the form fit function

Diagrams

Internal Diagrams

G..D14..1E (open-close, 3-position)	G..D16..1E (modulating, Y = DC 0/2...10 V →)
AC 24 V ~ / DC 24...48 V –	
AC 24 V ~ DC 24...48 V – AC 24...250 V ~ / 6 (2) A DC 12...30 V – / 2 A 1 G 6 Y1 7 Y2 S1 (Q11) S2 (Q12) S3 (Q14) S4 (Q21) S5 (Q22) S6 (Q24) 5° 85° M	AC 24 V ~ DC 24...48 V – DC 0/2...10 V – 1 G 2 G0 6 8 Y 9 U 100% 0% M


Connection diagrams

AC 24 V ~ / DC 24...48 V –			
Open-close, single wire control <i>Single Pole Single Throw (SPST)</i>	Open-close, two wire control <i>Single Pole Double Throw (SPDT)</i>	3-position control	Modulating control
AC 24 V ~ DC 24...48 V – 1 G 6 Y1 7 Y2 M	AC 24 V ~ DC 24...48 V – 1 G 6 Y1 7 Y2 M	AC 24 V ~ DC 24...48 V – 1 G 6 Y1 7 Y2 M	AC 24 V ~ DC 24...48 V – 1 G 2 G0 6 8 Y 9 U 100% 0% M

Cable labeling

Connection	Code	No.	Color	Abbreviation	Meaning
Actuators AC 24 V ~ DC 24...48 V =	G	1	red	RD	System potential AC 24 V ~ / DC 24...48 V =
	G0	2	black	BK	System neutral
	Y1	6	purple	VT	Positioning signal AC/DC 0 V, "clockwise" (G..D14..1E)
	Y2	7	orange	OG	Positioning signal AC/DC 0 V, "counter-clockwise" (G..D14..1E)
	Y	8	grey	GY	Signal in (G..D16..1E)
	U	9	pink	PK	Signal out (G..D16..1E)
Auxiliary switch	Q11	S1	grey/red	GY RD	Switch A input
	Q12	S2	grey/blue	GY BU	Switch A normally closed contact
	Q14	S3	grey/pink	GY PK	Switch A normally open contact
	Q21	S4	black/red	BK RD	Switch B input
	Q22	S5	black/blue	BK RD	Switch B normally closed contact
	Q24	S6	black/pink	BK PK	Switch B normally open contact

Dimensions

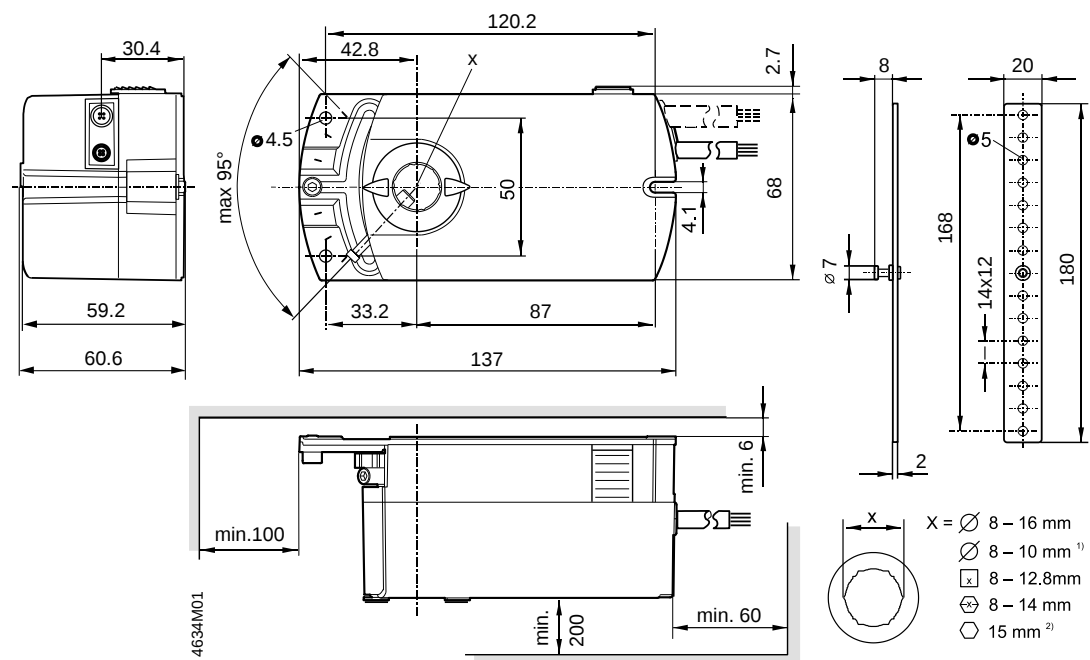

¹⁾ With centering element

²⁾ This value only works with the form fit function

Dimensions in mm

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
CH-6300 Zug
+41 58 724 2424
www.siemens.com/buildingtechnologies

© Siemens 2022
Technical specifications and availability subject to change without notice.

Document ID A6V12133742_en--_d
Edition 2025-05-22